



■ Connecting the Control Device

To connect the thermostat


- 1** Take the cap off the attachment plug.




- 2** Unscrew the fixing screw and take off the internal part.




- 3** Loosen the screw on clamp 2 and disconnect either one of two wires from clamp 2.

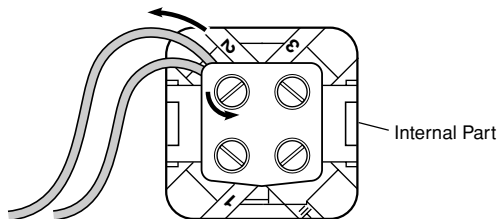


- 4** Loosen the screw on clamp 3 and connect the wire disconnected to clamp 3.

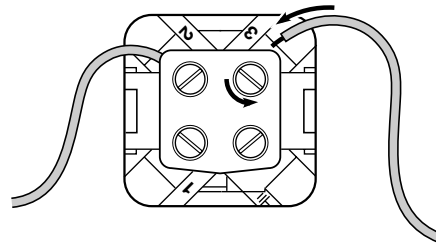

- 5** Tighten the screws on clamp 2 and 3.

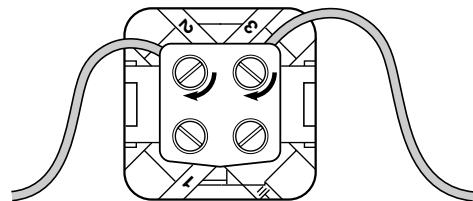

- 6** Put the internal part back and tighten the fixing screw.



- 7** Insert the thermostat plug.

4 Inspection



CAUTION

- Before starting any inspection or service, to avoid electric shock, please make sure the heater is shut down and that the power cord is disconnected.
- When cleaning the heater, please wear gloves to prevent possible injury.

Observations

- Please do not pour in the fuel tank the fuel used for cleaning the tank inlet filter ; after you finish to inspect inside the fuel tank, please do not return back into the fuel tank foul fuel taken out of the tank.